

Hydraulic Locking Core Pull Cylinders For Plastics and Die Cast Tools

AT
P: 0800 301 060
F: 0800 401 020
dme_oesterreich@milacron.com

BE
P: +32 (0) 15 28 87 30
F: +32 (0) 15 40 51 17
dme_benelux@milacron.com

CH
P: +41 0848 567 364
F: +41 0848 567 365
dme_schweiz@milacron.com

CZ
P: 800 142 451 | +420 572 151 754
F: 800 142 450 | +420 571 611 996
dme_cz@milacron.com

DE
P: 0800 664 82 50 | +49 (0) 2351 437 0
F: 0800 664 82 51 | +49 (0) 2351 437 220
dme_normalien@milacron.com

ES
P: 900 900 342
F: 900 900 343
dme_iberia@milacron.com

FR
P: +33 1 49 93 92 23
F: +33 1 49 93 92 22
dme_france@milacron.com

HU
P: 06 80 205003
F: +32 15 40 51 17
dme_hungary@milacron.com

IT
P: 800 089 734
F: 800 089 735
dme_italy@milacron.com

NL
P: +31 (0) 20 654 5571
F: +31 (0) 20 654 5572
dme_benelux@milacron.com

PL
P: +800 331 1312 | +32 15 21 50 92
F: +800 331 1313 | +32 15 40 51 92
dme_polska@milacron.com

PT
P: 800 207 900
F: 800 207 901
dme_iberia@milacron.com


SK
P: 0800 142 451 | +420 572 151 754
F: 0800 142 450 | +420 571 611 996
dme_cz@milacron.com

UK
P: +44 2071 3300 37
F: +44 2071 3300 36
dme_uk@milacron.com

Other Countries
P: +32 15 28 87 30
F: +32 15 40 51 17
dme_export@milacron.com

Hydraulic Locking Core Pull Cylinders For Plastics and Die Cast Tools

Enabling cost-saving movement of sliding cores

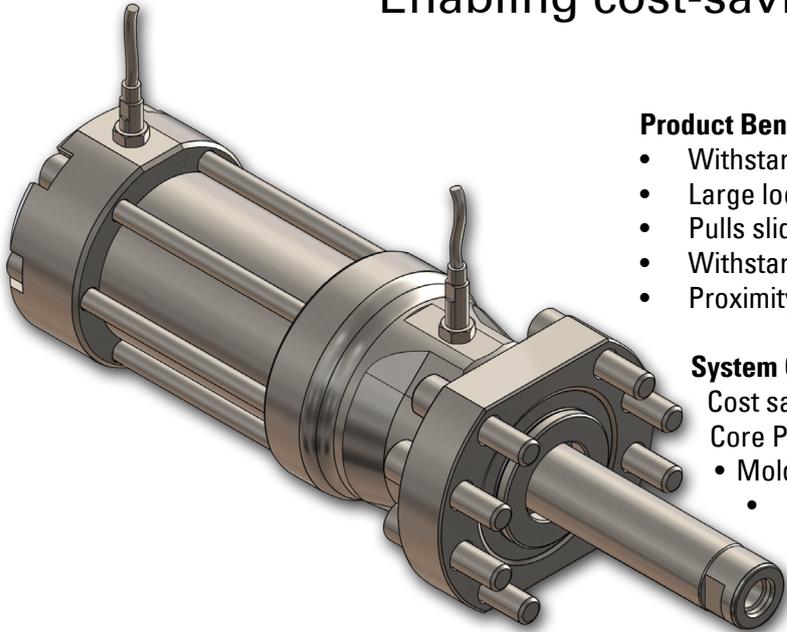

Product Benefits

- Withstands high loads
- Large locking surfaces promote extended service life
- Pulls sliding cores in injection molds and die cast tools
- Withstands temperatures up to 356°F (180°C)*
- Proximity sensors recognize full forward and full reverse

System Cost Savings

Cost savings achieved when the Hydraulic Locking Core Pull Cylinder is used instead of traditional methods:

- Mold design and manufacturing time
 - Mold fitting and assembly time
 - Mold maintenance time
- Material cost (smaller mold base required)
- Cycle time reduction

*

- When using proximity sensors standard to Core Pull Cylinders, the cylinder assembly will withstand temperatures up to 176°F (80°C).
- When an external method for sensing sliding core position is used, the cylinder assembly will withstand temperatures up to 356°F (180°C).
- (Proximity sensors are replaced by plugs)

Product Overview

When designing molds with sliding cores, the mold designer is often faced with the challenge of fitting all traditional components in as small a mold base as possible. There are different methods of actuating a sliding core, the most common of which uses horn or angle pins (Fig. 1) to move the slide when the mold opens or closes. Heel blocks are normally used behind the sliding core to withstand injection pressure acting on the sliding core. Not only do these components use up precious mold space, but they are tied to the movement of the platen. Some molded parts also require that the sliding core be moved prior to opening a mold. While it is possible to use standard cylinders (Fig. 2) to actuate the sliding core or heel block, typical designs require additional mold design and machining, and waste mold space.

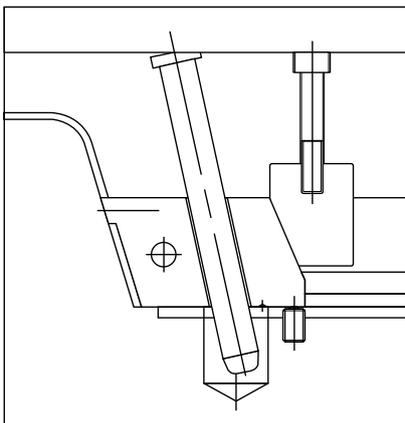


Fig. 1. Slide Movement example using an angle pin and locking with a heel block (wedge).

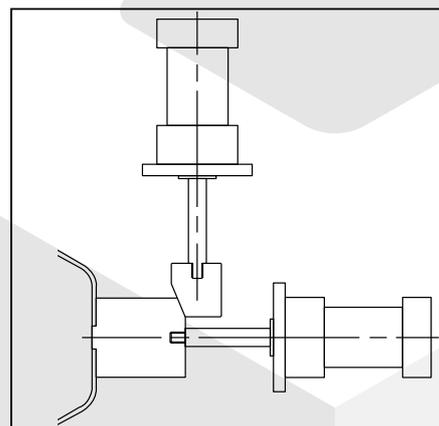


Fig. 2. Slide Movement example using a hydraulic cylinder to actuate slide, and a separate cylinder to actuate the heel block.

Get the HLCP Cylinder Advantage!

The Hydraulic Locking Core Pull (HLCP) Cylinder replaces traditional slides and heel blocks, enabling independent movement of the sliding core while eliminating the need for a heel block. By using a segmented ring that presses into an internal groove inside the cylinder assembly while in closed position, the injection pressure from the part cavity acts against the cross section of the segmented ring, eliminating the need for heel blocks.

Eliminating separate heel blocks or additional cylinders can result in a smaller mold base size, simplifying mold designs and increasing cost savings!

The HLCP Cylinder is a robust, compact design. Available in seven sizes, each size has two available standard strokes. Due to the modular design of the HLCP Cylinder, special strokes are available upon request with quick delivery. The cylinder is constructed of hardened steel for extra long service life. Because of the cylinder's special design and breadth of assembly sizes available, a wide range of holding forces are possible with a hydraulic holding pressure of only 870 PSI (60 Bar).


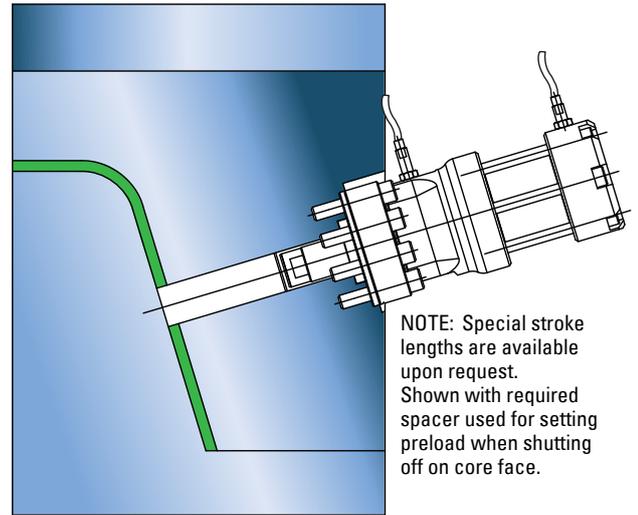


Fig. 3. Slide Movement example using the Hydraulic Locking Core Pull Cylinder.

REF	Stroke (inch)	Stroke (mm)	Rod Ø	Cylinder Bore Ø
HLCP060-1000	1.00"	25,40	16 mm	30 mm
HLCP060-2000	2.00"	50,80		
HLCP100-1250	1.25"	31,75	20 mm	36 mm
HLCP100-2500	2.50"	63,50		
HLCP150-1375	1.375"	34,925	25 mm	45 mm
HLCP150-2750	2.75"	69,85		
HLCP200-1750	1.75"	44,45	32 mm	56 mm
HLCP200-3500	3.50"	88,90		
HLCP300-2000	2.00"	50,80	42 mm	71 mm
HLCP300-4000	4.00"	101,6		
HLCP500-2500	2.50"	63,50	50 mm	84 mm
HLCP500-5000	5.00"	127,00		
HLCP750-3000	3.00"	76,20	60 mm	105 mm
HLCP750-6000	6.00"	152,40		




REF	at 160 Bar (2321 PSI) Preload [mm]	Holding Force in kilo Newton [kN]		Holding Force in Pound Force [bf]		Holding Force in Metric ton [ton]		Holding Force in UK (troy) ton [ton]		Holding Force in US (avdp) ton [ton]	
		Without Preload	With Preload	Without Preload	With Preload	Without Preload	With Preload	Without Preload	With Preload	Without Preload	With Preload
HLCP060-1000	0.15	60	35	13,488	7,868	6.12	3.57	5.46	3.19	6.74	3.93
HLCP060-2000	0.20										
HLCP100-1250	0.15	100	50	22,480	11,240	10.2	5.10	9.11	4.55	11.24	5.62
HLCP100-2500	0.20										
HLCP150-1375	0.10	150	65	33,720	14,612	15.3	6.63	13.65	5.91	16.86	7.31
HLCP150-2750	0.15										
HLCP200-1750	0.15	200	110	44,960	24,728	20.39	11.21	18.20	10.01	22.48	12.36
HLCP200-3500	0.20										
HLCP300-2000	0.15	300	160	67,440	35,968	30.59	16.31	27.31	14.57	33.72	17.98
HLCP300-4000	0.20										
HLCP500-2500	0.20	500	300	112,400	67,440	50.98	30.59	45.51	27.31	56.20	33.72
HLCP500-5000	0.30										
HLCP750-3000	0.20	750	400	168,600	89,920	76.48	40.79	68.27	36.41	84.30	44.96

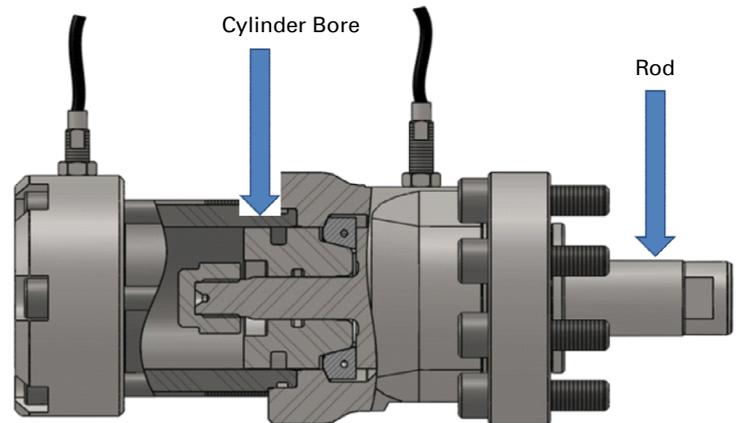

The HLCP Cylinder operates between fully opened and fully closed positions, both of which are sensed by high pressure proximity sensors without any mechanical contact. The HLCP Cylinder has a built-in cushion at the fully retracted end of the piston stroke, extending the service life of the cylinder.

The HLCP Cylinder's integral flange allows easy installation and mounts to the mold using socket head cap screws. Socket head cap screw sizes used for mounting the HLCP Cylinder to the mold are UNC-type. A spacer plate (shim) is supplied with the HLCP Cylinder for installation beneath the HLCP Cylinder flange, enabling fine adjustment in the mold. The spacer plate also provides important preload on the cylinder rod, particularly when the sliding core must shut off against the opposing wall of the core. Hydraulic fittings are NPTF-type fittings.

Due to the nature of the flange mounting design, the same size HLCP Cylinders are easily interchangeable. The cylinder's flange and screw mounting method ensures that the proximity sensors will always be positioned in the same orientation when the HLCP Cylinder is installed to the side of the mold.

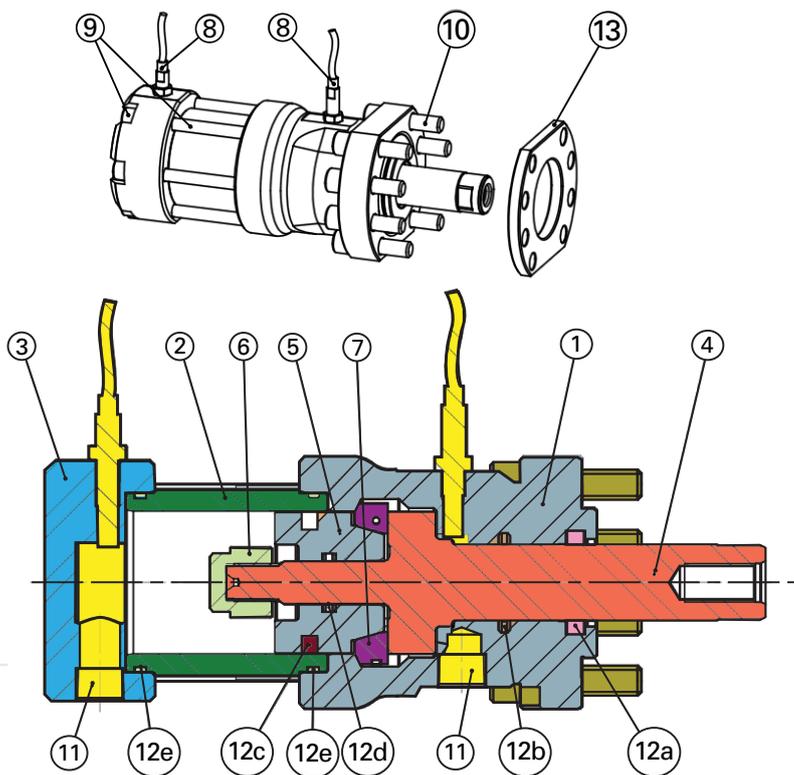

Item	Part Name	Notes
1	Body	
2	Sleeve	
3	Cap	
4	Rod	
5	Piston	
6	Piston Bushing	
7	Segment kit	
8	Sensor	BHS006Y (NPN type) BHS006U (PNP type)
9	Assembly screw	
10	Mounting screw	
11	Oil cap	
12	Sealing kit	
12a	Excluder	
12b	Step seal	
12c	Glyd ring	
12d	O-ring	
12e	O-ring	
13	Spacer	

NOTE: Sensors supplied are NPN type as standard. PNP type sensors are available upon request. Larger size HLCP cylinders use additional retainers with proximity Sensors. Sensors require power.